BUILD DECKING WITH DECK PRO®



Deck Pro® makes it possible to achieve a discreet finish without visible screws. The tool helps you install the decking screw diagonally from the edge of the board so that the screw is hidden.



Adjust distance

Set the desired distance between the decking boards from 3-7.5 mm



Place on the board

Squeeze the handle, place and release to grab the board



Customize width

Fits decking boards from 85 mm to 150 mm in width



Fasten!

The tool works as a helping hand when the screw needs to be installed

SCREWS AND MATERIAL TYPES

The Deck Pro® screw has a dimension of 4.5x60 mm and is available in two different versions.









4,5x60

High-quality surface treatment in the C4 class and hardened quality steel - ensures long durability.





* TX 15




4.5x60

High-quality acid-resistant stainless A4 steel. The screw resists rust in even the most severely exposed environments, e.g. coastal areas.

Developed for decking boards on 18-34 mm

WOOD TYPE	
Treated timber	~
Heat treated timber	~
Pine	~
Hardwood	×

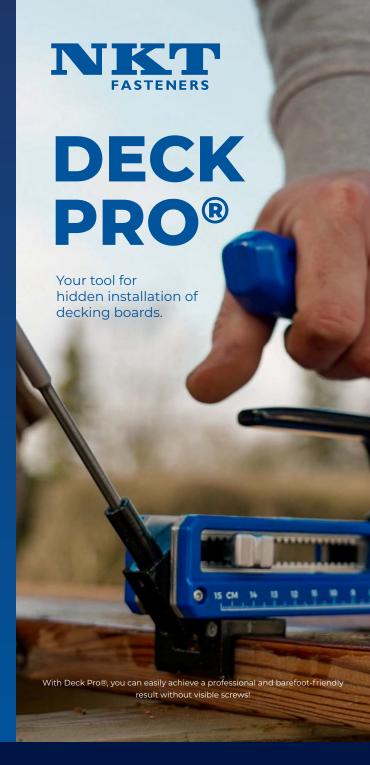





DECK PRO®



UNIQUE ADJUSTMENT FUNCTION

The only tool on the market that can can be adapted to all common decking boards 85mm to 150mm.



ROBUST AND STABLE

Strong construction, which stands stable against the boards. Carefully tested to be able to withstand at least 100 kg of direct load - compare and you will feel the difference!



EASY TOWORK WITH

The screw bites quickly and the included bits automatically stop at the correct depth. Built-in spacers help you determine the correct distance between the boards for an even result

